

BF 1608 Series

Multilayer Chip Band-Pass Filters

Features

- ❖ Ultra small SMD type with low loss at pass-band and high attenuation at stop-band.
- ❖ RoHS compliant.

Applications

- ❖ 0.8 ~ 6 GHz wireless communication systems, including DECT/PACS/PHS/GSM/DCS phones, WLAN card, Bluetooth modules, Hyper-LAN, etc.



Specifications

Part Number	Freq. Range (MHz)	Insertion Loss @ BW (dB)	VSWR @ BW	Frequency	Attenuation (dB)
BF1608-L2R4DAA_	2400 ~ 2500	1.7 max. @ 25°C 1.9 max. @ -40~105°C	2.0 max.	880 ~ 915MHz	30 min.
				1710 ~ 1785MHz	30 min.
				1850 ~ 1910MHz	25 min.
				2170MHz	8 typ.
				2620MHz	1.9 typ.
				4800 ~ 5000MHz	25 min.
				7200 ~ 7500MHz	15 min.

Q'ty/Reel (pcs)

: 4,000

Operating Temperature Range

: -40 ~ +105 °C

Storage Temperature Range

: -40 ~ +105 °C

Storage Period

: 12 months max.*

*12 months in vacuum sealed bag and 1 week after opened. Please keep unused parts in vacuum sealed bags.

Solder Paste

: SAC 305 type is recommended.

Power Capacity


: 2W max.

Part Number

BF 1608 - L 2R4 DAA □ /LF
 ① ② ③ ④ ⑤ ⑥ ⑦

① Type	BF : Band-Pass Filter	② Dimensions (L × W)	1.6 × 0.8 mm
③ Material Code	L	④ Frequency Range	2R4=2400MHz
⑤ Specification Code	DAA	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	/LF=lead-free		


Terminal Configuration




No.	Terminal Name	No.	Terminal Name
①	GND	③	GND
②	IN/OUT	④	IN/OUT

Dimensions and Recommended PC Board Pattern

Unit : mm

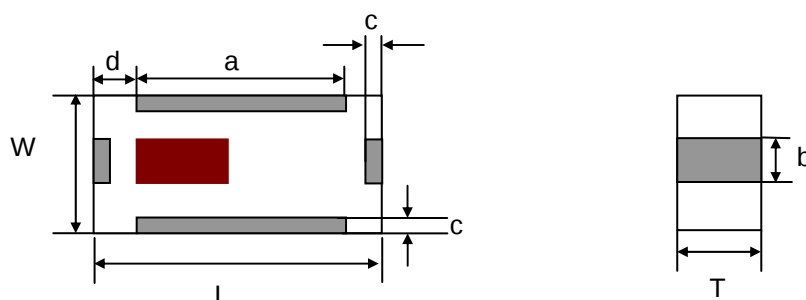


Mark	L	W	T	a	b	c	d
Dimensions	1.6 ± 0.10	0.8 ± 0.10	0.6 ± 0.10	0.7 ± 0.15	0.3 ± 0.10	0.15 ± 0.10	0.45 ± 0.15

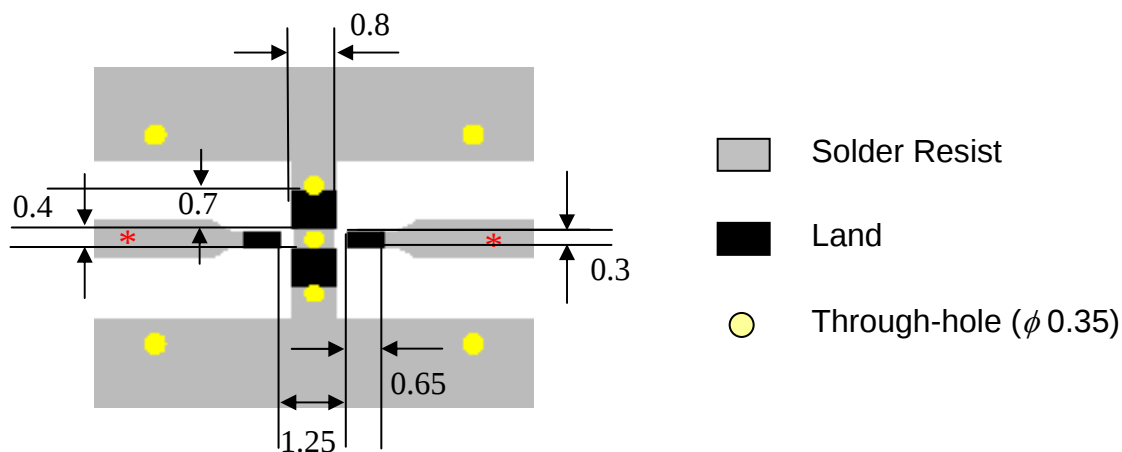


* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

Measuring Diagram

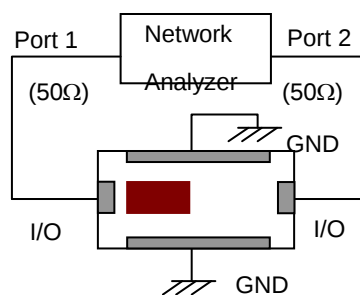

Electrical Characteristics (T=25°C)

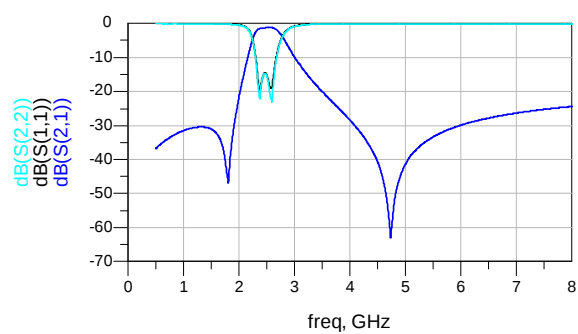


Notes

- ❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Taping Specifications

❖Tape Dimensions (Unit: mm) & Quantity

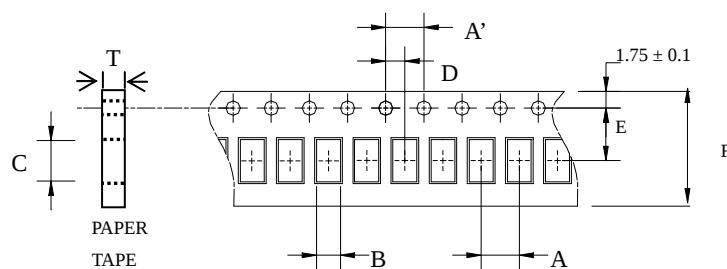


Type	A	A'	B	C	D	E	F	T	Quantity/reel	Tape material
1608	4.0±0.1	4.0±0.1	1.10±0.1	1.92±0.1	2.0±0.1	3.5±0.1	8.0±0.1	0.75±0.05	4,000pcs	Paper


❖Reel Dimensions (Unit: mm)

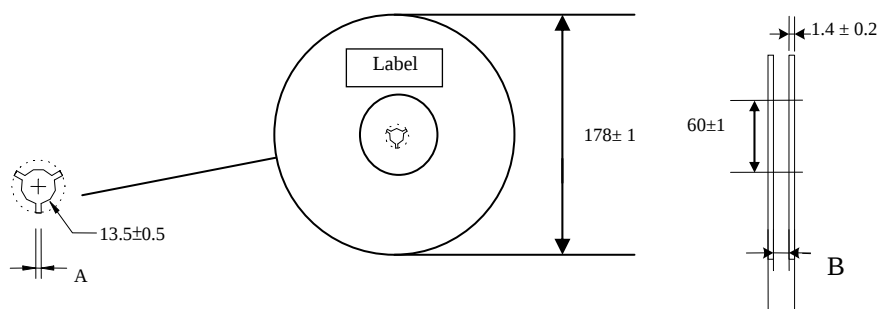

Type	A	B
1608	2.3±0.5	9.0±0.3

❖Leader and Trailer Tape

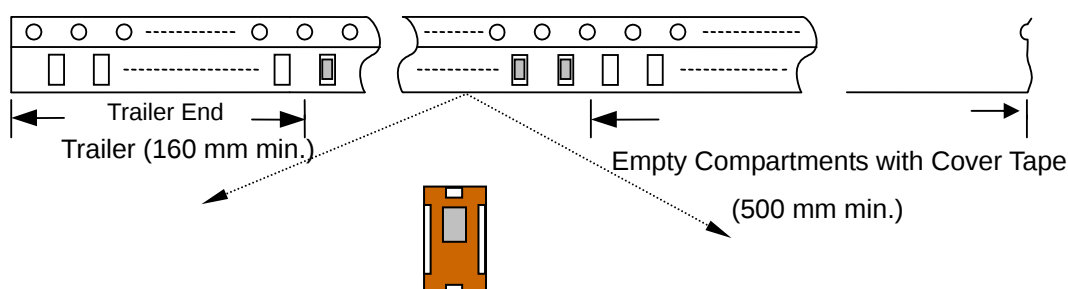

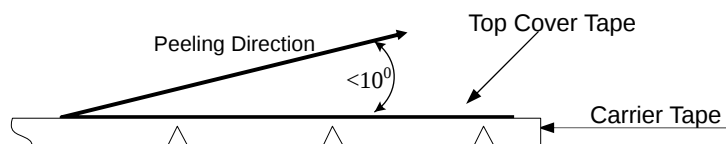❖Peel-off Force

Peel-off force should be in the range of 0.1 – 0.6 N at a peel-off speed of 300 ± 10 mm/min .


❖Storage Conditions

- (1) Temperature: 5 ~35°C , relative humidity (RH): 45~75%.
- (2) Non-corrosive environment.

Notes

- ❖The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Mechanical & Environmental Characteristics

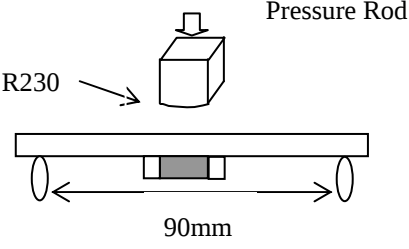Item	Requirements	Procedure
Solderability	1. No apparent damage 2. More than 75% of the terminal electrode shall be covered with new solder	1. Preheat: $120 \pm 5^{\circ}\text{C}$ 2. Solder: $245 \pm 5^{\circ}\text{C}$ for 5 ± 1 sec
Soldering strength (Termination Adhesion)	1. 10N minimum	1. Solder specimen onto test jig. 2. Apply push force at 0.5mm/s until electrode pads are peeled off or ceramic are broken. Pushing force is applied to longitude direction
Deflection (Substrate Bending)	1. No apparent damage 2. Fulfill the electrical specification	1. Solder specimen onto test jig (FR4,1.6mm) using the recommend soldering profile. 2. Apply a bending force of 2mm deflection 
Heat/Humidity Resistance	1. No apparent damage 2. Fulfill the electrical specification after test	1. Temperature: $85 \pm 2^{\circ}\text{C}$ 2. Humidity: 90% ~ 95% RH 3. Duration: 1000 ± 48hrs 4. Recovery: 1-2hrs
Thermal shock (Temperature Cycle)	1. No apparent damage 2. Fulfill the electrical specification after test	1. One cycle/step 1 : $125 \pm 5^{\circ}\text{C}$ for 30 min step 2 : $-40 \pm 5^{\circ}\text{C}$ for 30 min 2. No of cycles : 100 3. Recovery:1-2 hrs
Low Temperature Resistance	1. No apparent damage 2. Fulfill the electrical specification after test	1. Temperature: $-40^{\circ} \pm 5^{\circ}\text{C}$ 2. Duration: 500 ± 24hrs 3. Recovery: 1-2hrs

Soldering Conditions

❖ Typical Soldering Profile for Lead-free Process

Reflow Soldering :

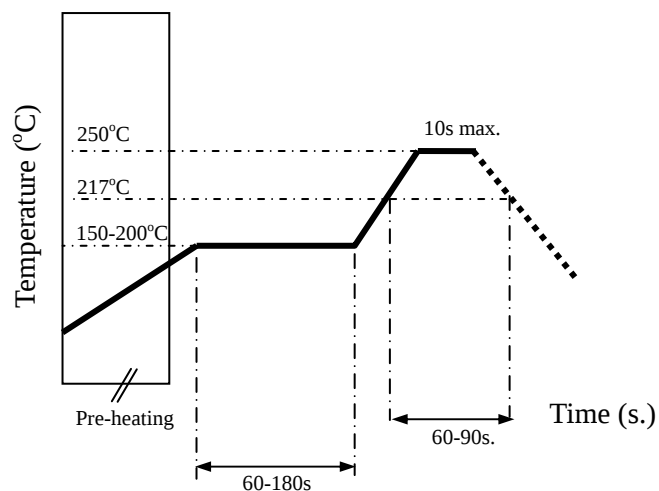

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: acx@acxc.com.tw

<http://www.acxc.com.tw>