

BF 4532 Series

Multilayer Chip Band-Pass Filters

Features

- ❖ Ultra small SMD type with low loss at pass-band and high attenuation at stop-band.
- ❖ RoHS compliant.

Applications

- ❖ 5.49~5.835 GHz wireless communication systems



Specifications

Part Number	Freq. Range (MHz)	Insertion Loss @ BW (dB)	Ripple @ BW (dB)	VSWR @ BW	Frequency	Attenuation (dB)
BF4532-R5R6DAQ_	5490 ~5835	2.2 typ./ 2.5 max. @85°C 2.6 max. @95°C	2.0 max.	2.0 max.	2400 ~ 2500MHz	35 typ./ 30 min.
					5170 ~ 5330MHz	42 typ./ 40 min.
					5925 ~ 7125MHz	1.0 typ.
					10980 ~11670MHz	30 typ./ 25 min.


Q'ty/Reel (pcs) : 1000
 Operating Temperature Range : -40 ~ +95 °C
 Storage Temperature Range : -40 ~ +95 °C
 Storage Period : 12 months max.
 Power Capacity : 3W max.

Part Number

BF **4532** **-** **R** **5R6** **DAQ** **□** **/LF**
 ① ② ③ ④ ⑤ ⑥ ⑦

① Type	BF : Band-Pass Filter	② Dimensions (L × W)	4.5 × 3.2 mm
③ Material Code	R	④ Frequency Range	5R6=5600MHz
⑤ Specification Code	DAQ	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	/LF=lead-free		


Terminal Configuration

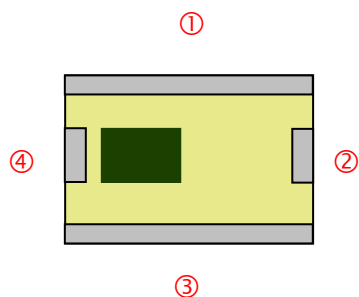


No.	Terminal Name	No.	Terminal Name
①	GND	③	GND
②	OUT/IN	④	IN/OUT

Dimensions and Recommended PC Board Pattern

Unit : mm

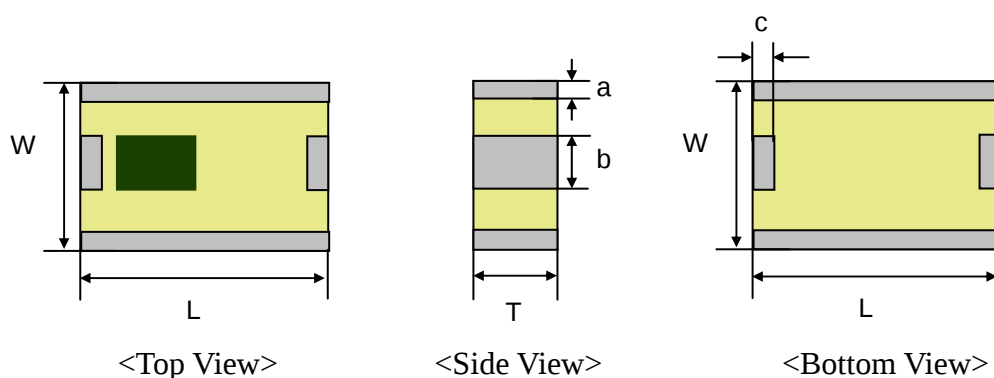


Mark	L	W	T	a	b	c
Dimensions	4.5 ± 0.2	3.2 ± 0.2	2.2 max.	0.4 ± 0.2	0.8 ± 0.2	0.3 ± 0.15

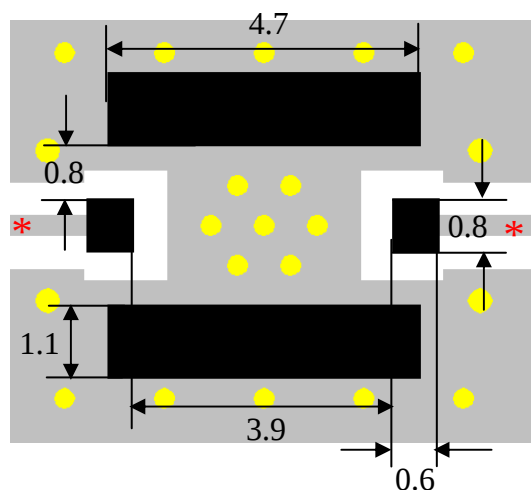


- Solder Resist
- Land
- Through-hole ($\phi 0.3$)

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

Measuring Diagram

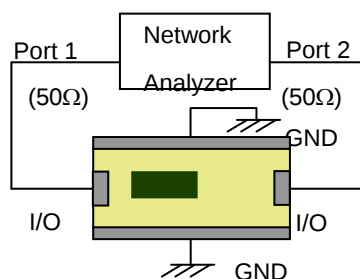

Electrical Characteristics (T=25°C)

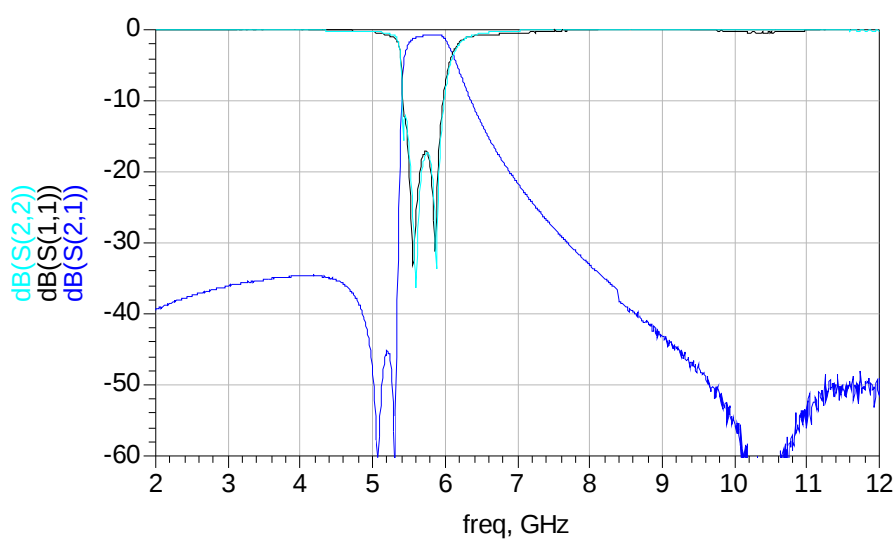


Notes

- ❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Taping Specifications

❖Tape & Reel Dimensions (Unit: mm) vs. Quantity (pcs)

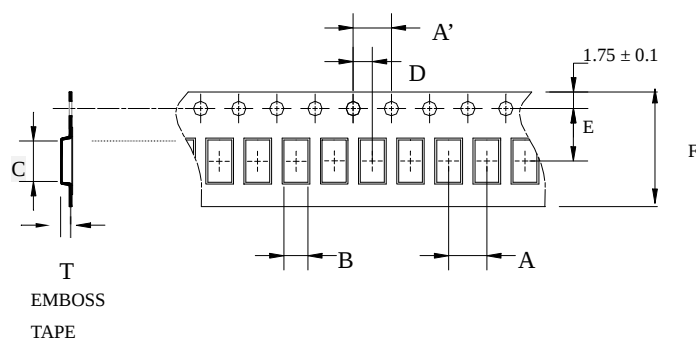

Type	A	A'	B	C	D	E	F	T	Quantity/per reel	Tape material
4532	8.0± 0.10	4.0± 0.10	3.50± 0.10	4.90± 0.10	2.0± 0.10	5.50± 0.10	12.0± 0.10	2.20± 0.10	1,000pcs	Plastic (Embossed)


❖Reel Dimensions (Unit: mm)

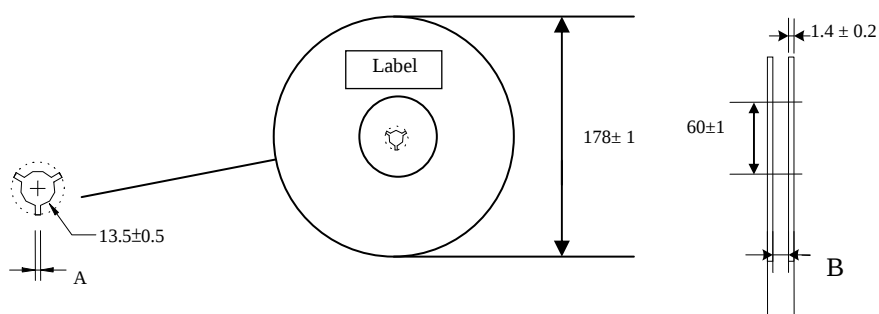


Label: Customer's Name,
ACX P/N, Q'ty, Date,
ACX Corp.

Type	A	B
4532	2.3±0.5	17.0±0.5

❖Leader and Trailer Tape

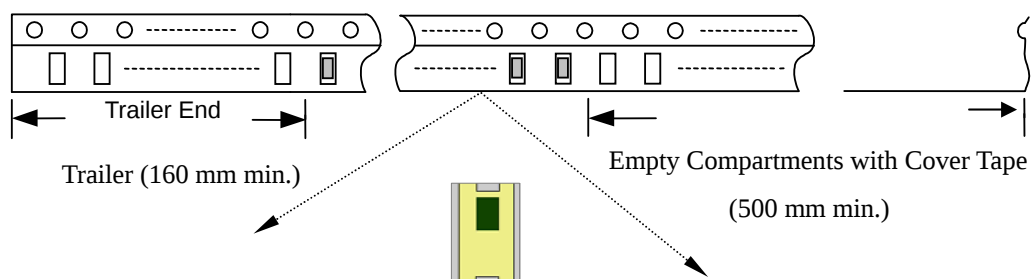

❖Peel-off Force

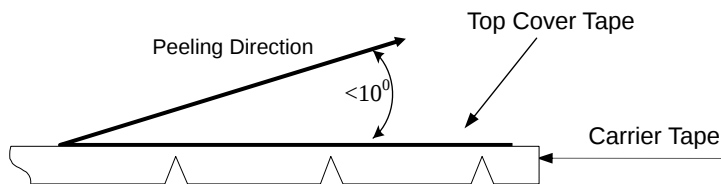

Peel-off force should be in the range of 0.1 – 0.6 N at a peel-off speed of 300 ± 10 mm/min .


❖Storage Conditions

- (1) Temperature: 5 ~35°C , relative humidity (RH): 45~75%.
- (2) Non-corrosive environment

Notes

❖The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Mechanical & Environmental Characteristics

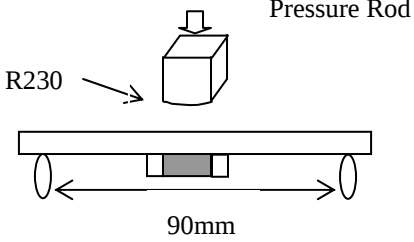Item	Requirements	Procedure
Solderability	- No apparent damage - More than 95% of the terminal electrode shall be covered with new solder	- Preheat: $120 \pm 5^{\circ}\text{C}$ - Solder: $245 \pm 5^{\circ}\text{C}$ for 5 ± 1 sec
Soldering strength (Termination Adhesion)	10N minimum	- Solder specimen onto test jig. - Apply push force at 0.5mm/s until electrode pads are peeled off or ceramic are broken. Pushing force is applied to longitude direction.
Deflection (Substrate Bending)	No apparent damage	- Solder specimen onto test jig (FR4, 1.6 mm) using the recommend soldering profile. - Apply a bending force of 1 mm deflection 
Heat/Humidity Resistance	- No apparent damage - Fulfill the electrical specification after test	- Temperature: $85 \pm 2^{\circ}\text{C}$ - Humidity: 90% ~ 95% RH - Duration: 1000 ± 48hrs - Recovery: 1-2hrs
Thermal shock (Temperature Cycle)	- No apparent damage - Fulfill the electrical specification after test	- One cycle/step 1 : $125 \pm 5^{\circ}\text{C}$ for 30 min step 2 : $-40 \pm 5^{\circ}\text{C}$ for 30 min - No of cycles : 100 - Recovery: 1-2 hrs
Low Temperature Resistance	- No apparent damage - Fulfill the electrical specification after test	- Temperature: $-40 \pm 5^{\circ}\text{C}$ - Duration: 500 ± 24hrs - Recovery: 1-2hrs

Soldering Conditions

❖ Typical Soldering Profile for Lead-free Process

Reflow Soldering :

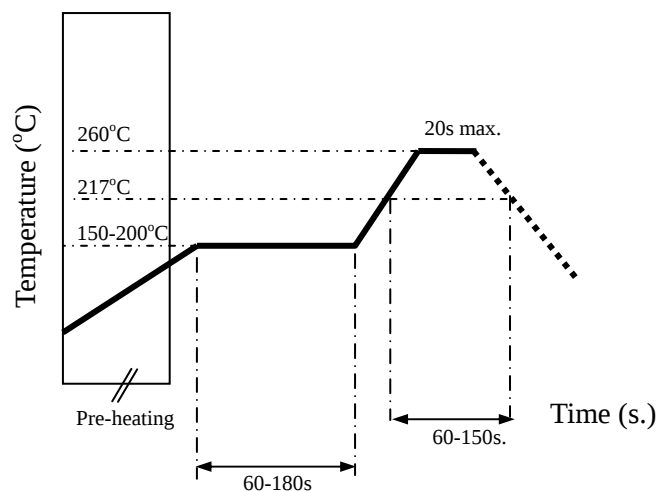

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: acx@acxc.com.tw

<http://www.acxc.com.tw>