

AT3216 Series

Multilayer Chip Antenna

Features

- ❖ Monolithic SMD with small, low-profile and light-weight type.
- ❖ Wide bandwidth
- ❖ RoHS compliant



Applications

- ❖ Bluetooth/Wireless LAN/Home RF
- ❖ ISM band 2.4GHz applications

Specifications

Part Number	Operating Frequency (MHz)	Peak Gain (XZ-Total)	Average Gain (XZ- Total)	VSWR	Impedance
AT3216 -A2R7HAA_	2400 ~ 2500	1.5 dBi typ.	0.0 dBi typ.	2 max.	50


Q'ty/Reel (pcs) : 3,000pcs
 Operating Temperature Range : -40 ~ +125°C
 Storage Temperature Range : -40 ~ +85°C
 Storage Period : 12 months max.
 Power Capacity : 3W max. (Rated Voltage: 12V)

Part Number

AT 3216 - A 2R7 HAA □ /LF
 ① ② ③ ④ ⑤ ⑥ ⑦

① Type	AT : Antenna	② Dimensions (L x W)	3.2x 1.6 mm
③ Material Code	A	④ Initial center frequency	2R7=2700MHz
⑤ Specification Code	HAA	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	/LF=lead-free		


Terminal Configuration

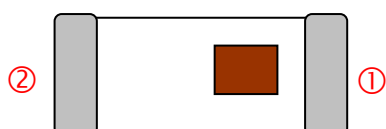

No.	Terminal Name	No.	Terminal Name
①	Feeding Point	②	NC


Dimensions and Recommended PC Board Pattern

Unit : mm

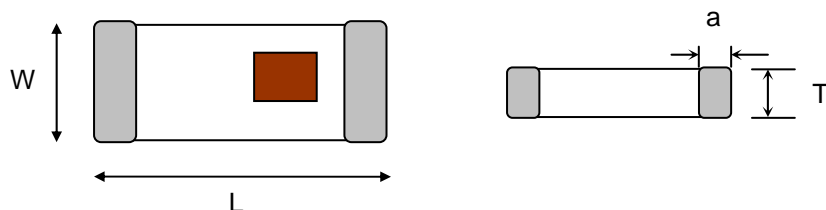


Mark	L	W	T	a
Dimensions	3.2±0.2	1.6±0.2	1.3+ 0.1/-0.2	0.5±0.3

(a) Without Matching Circuits

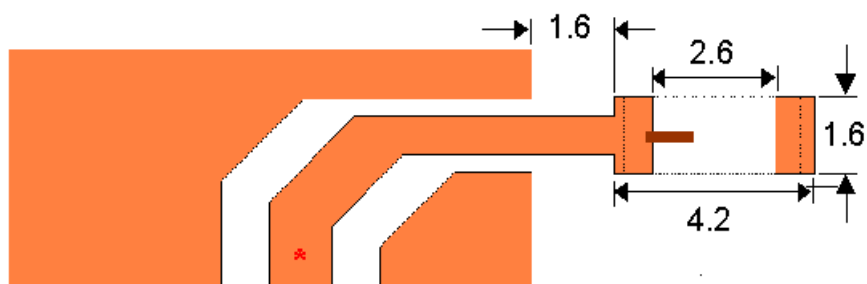


(b) With Matching Circuits

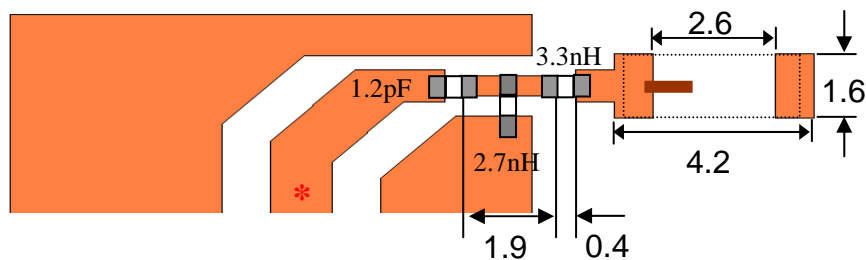

*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

Typical Electrical Characteristics (T=25°C)





❖ Test Board

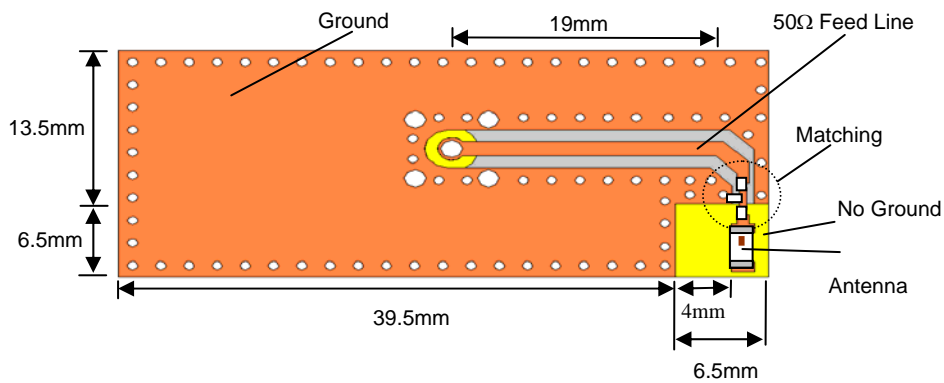

❖ Return Loss



(a) Without Matching Circuits

(b) With Matching Circuits

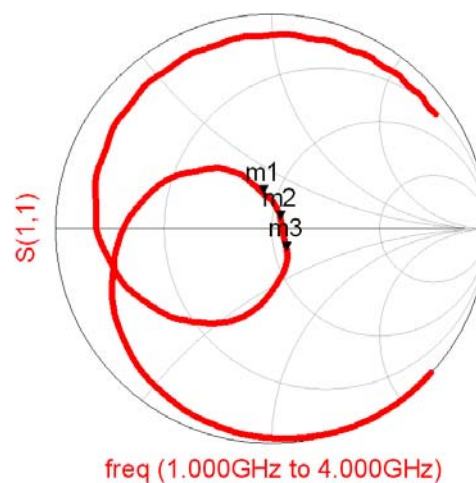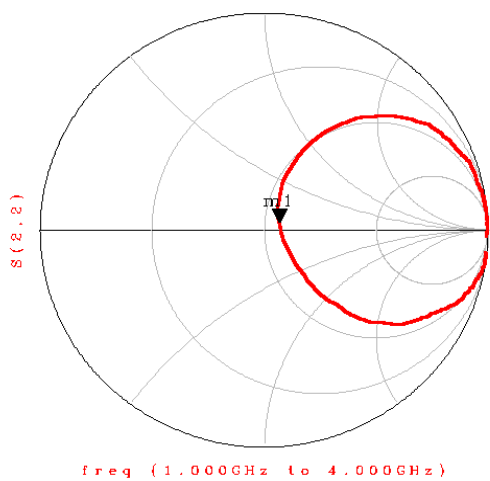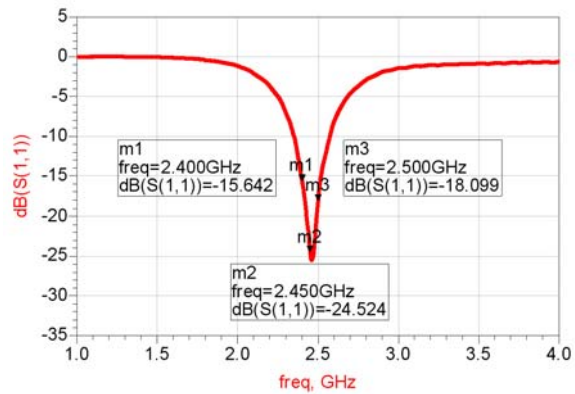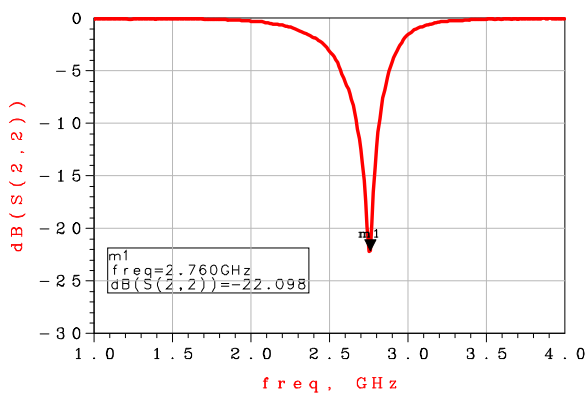


❖ Radiation Patterns (Tee-Matching Circuits)


(Antenna Efficiency: 2400 / 2450 / 2500MHz: 73 / 80 / 73%)

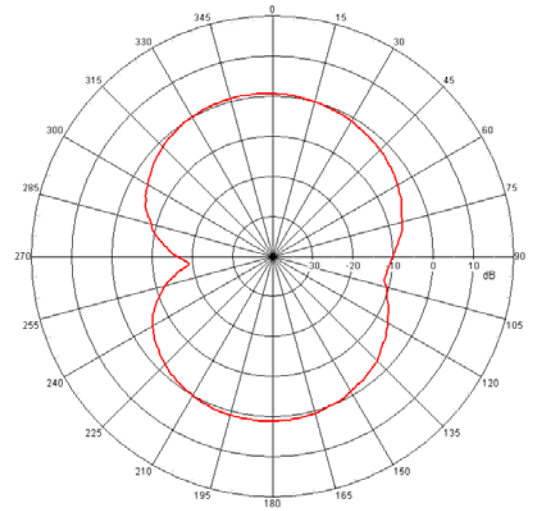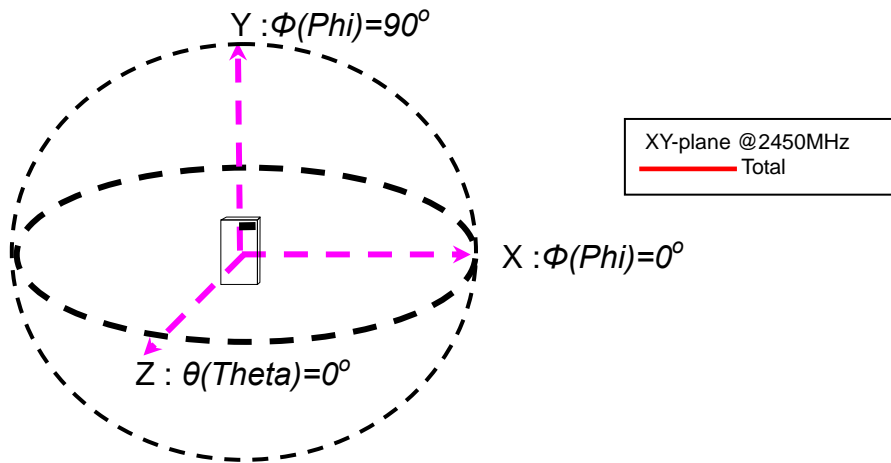

XZ-plane @2450MHz
Total

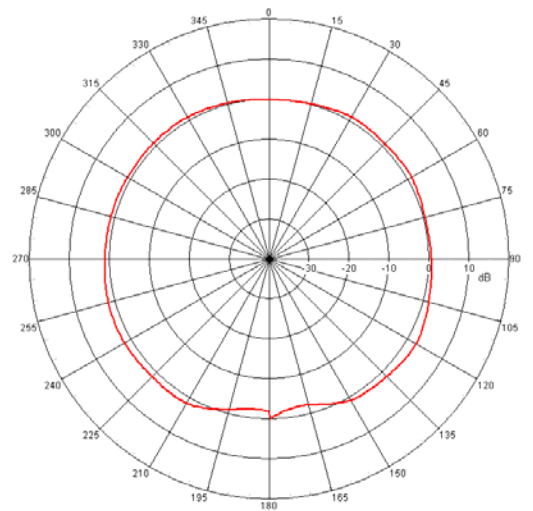


YZ-plane @2450MHz
Total

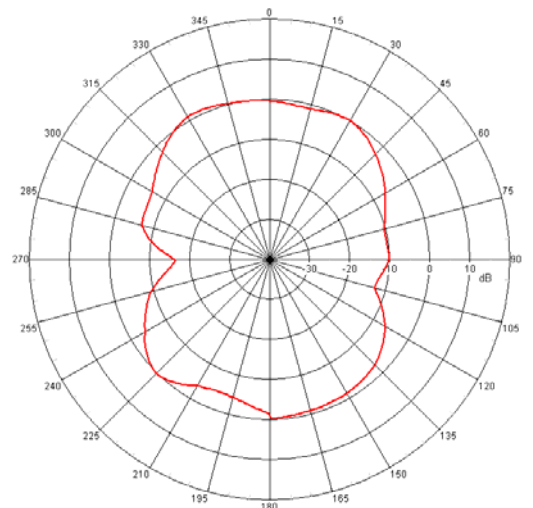


Applications (Operating Frequency: 1965~2040MHz)

With Matching Circuits

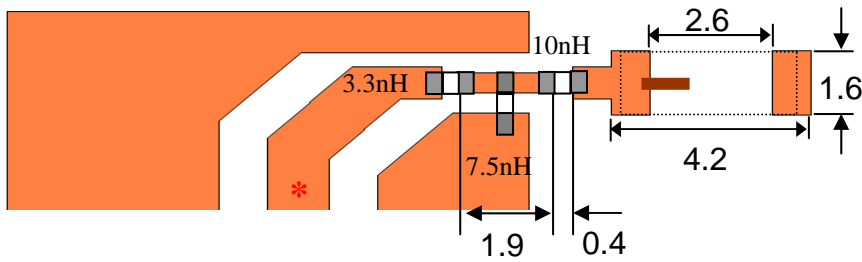



*Line width should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness.

❖ Test Board

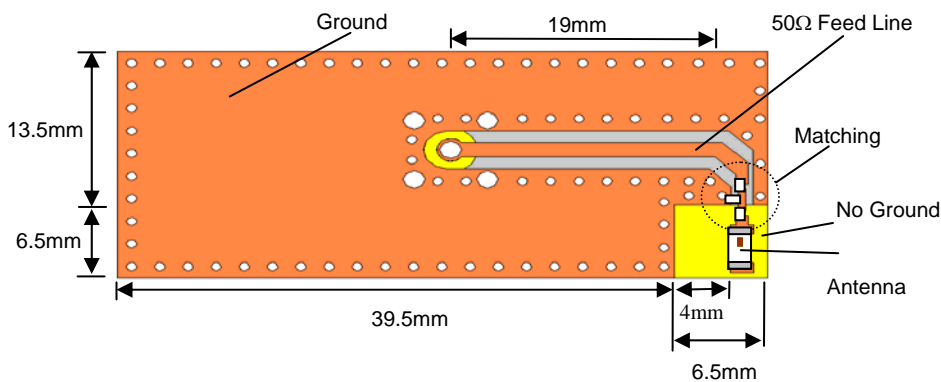



❖ Return Loss

With Matching Circuits

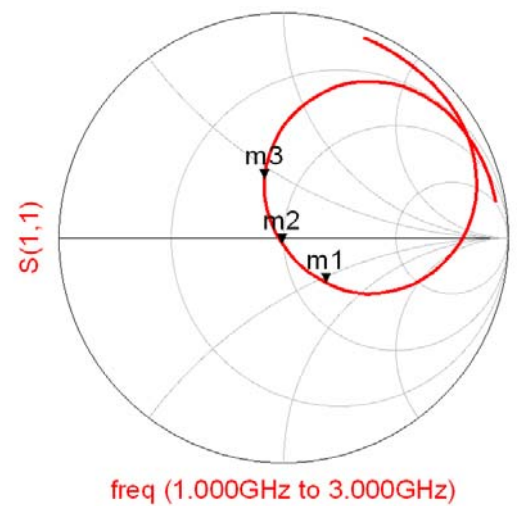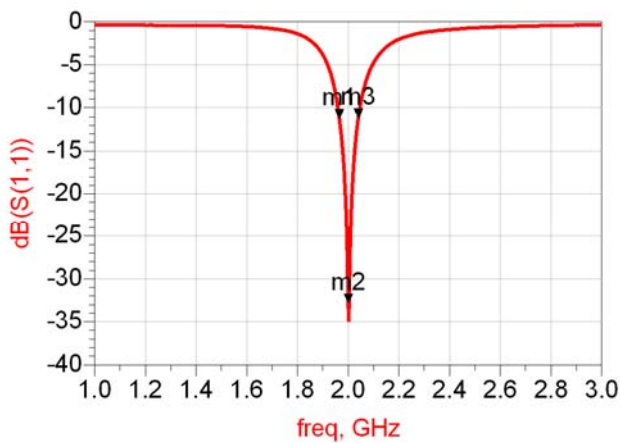


❖ Radiation Patterns


(Antenna Efficiency: 1965 / 2000 / 2040MHz: 58 / 65 / 56%)

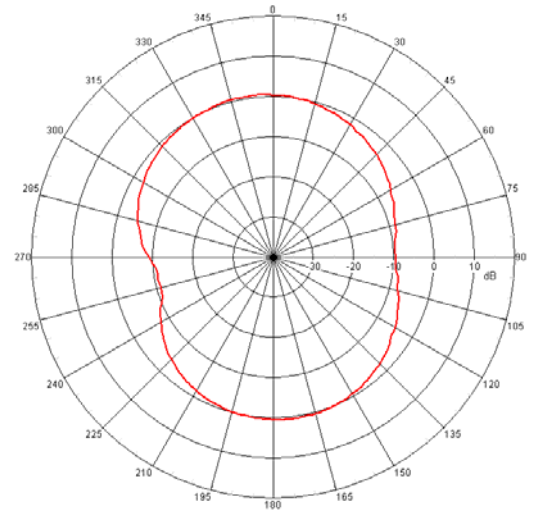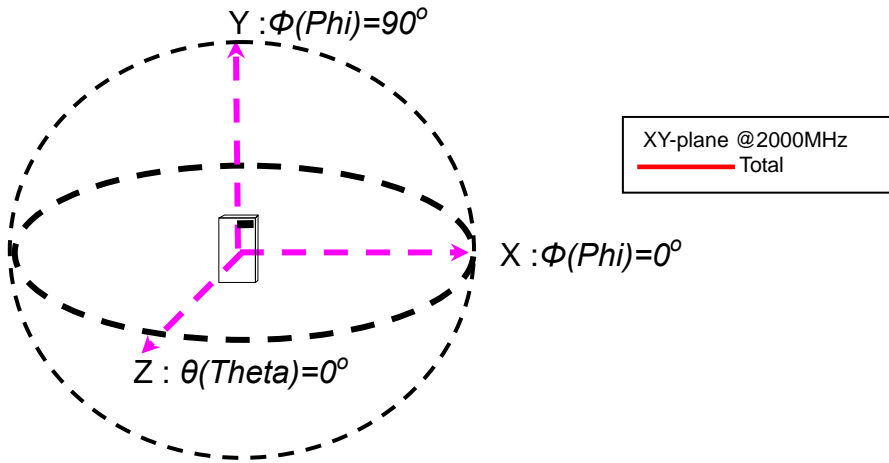

XZ-plane @2000MHz
Total

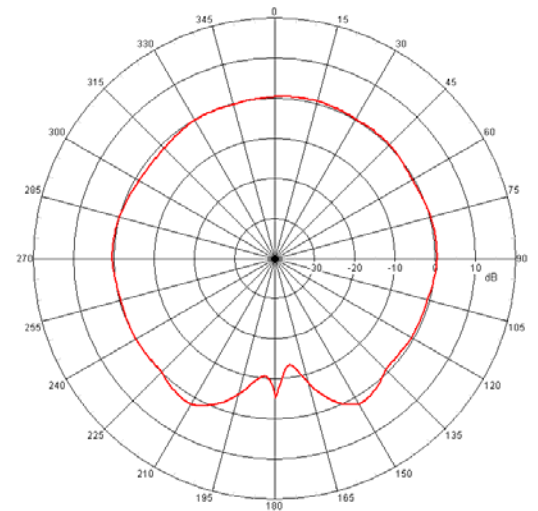


YZ-plane @2000MHz
Total

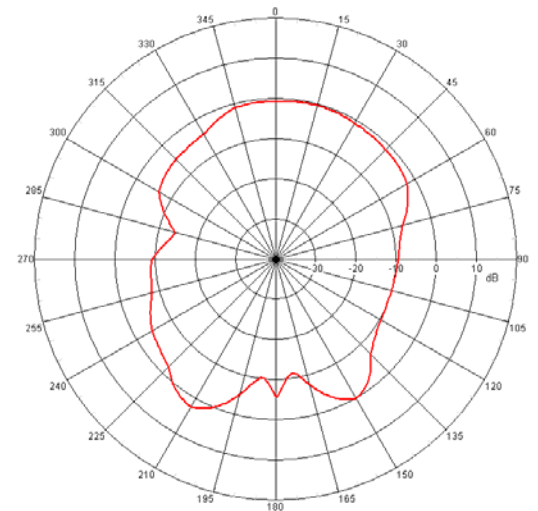



Taping Specifications

❖Tape & Reel Dimensions (Unit: mm) vs. Quantity (pcs)

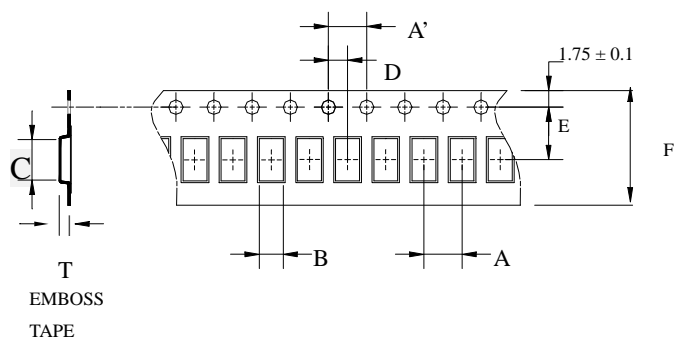

Type	A	A'	B	C	D	E	F	T	Quantity/per reel	Tape material
AT3216	4.0±	4.0±	1.88±	3.5±	2.0±	3.5±	8.00±	1.27±	3,000pcs	Plastic (Embossed)
	0.1	0.05	0.1	0.1	0.05	0.05	0.1	0.1		


❖Reel Dimensions (Unit: mm)

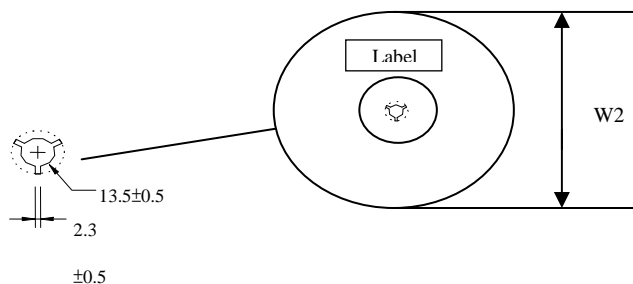


Label: Customer's Name,
ACX P/N, Q'ty, Date,
ACX Corp

Type	W2	W3	W4	W5
AT3216	178±1	60±1	1.4±0.2	17±0.5

❖Leader and Trailer Tape

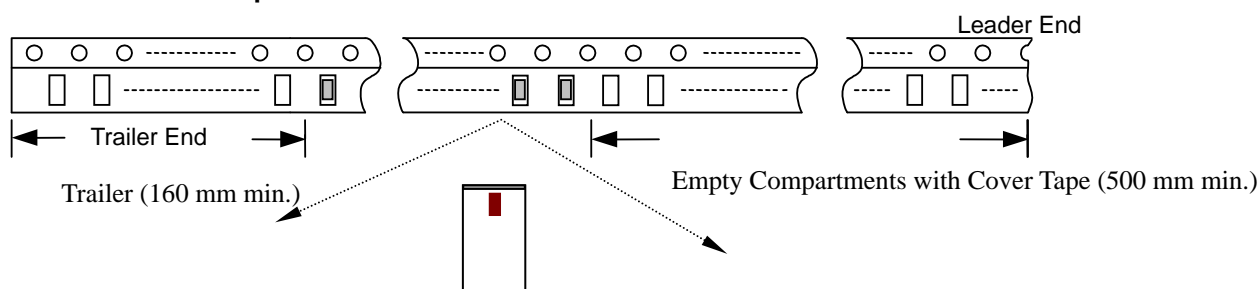

❖Peel-off Force

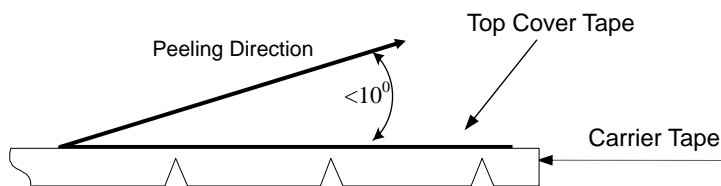

Peel-off force should be in the range of 0.1 – 0.6 N at a peel-off speed of 300 ± 10 mm/min .


❖Storage Conditions

- (1) Temperature: 5 ~35°C , relative humidity (RH): 45~75%.
- (2) Non-corrosive environment

Notes

❖The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Mechanical & Environmental Characteristics

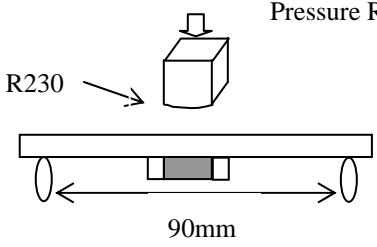Item	Requirements	Procedure
Solderability	<ol style="list-style-type: none"> No apparent damage More than 95% of the terminal electrode shall be covered with new solder 	<ol style="list-style-type: none"> Preheat: $120 \pm 5^\circ\text{C}$ Solder: $245 \pm 5^\circ\text{C}$ for 5 ± 1 sec
Soldering strength (Termination Adhesion)	<ol style="list-style-type: none"> 10N minimum 	<ol style="list-style-type: none"> Solder specimen onto test jig. Apply push force at 0.5mm/s until electrode pads are peeled off or ceramic are broken. Pushing force is applied to longitude direction
Deflection (Substrate Bending)	<ol style="list-style-type: none"> No apparent damage 	<ol style="list-style-type: none"> Solder specimen onto test jig (FR4, 1.6mm) using the recommend soldering profile. Apply a bending force of 2mm deflection 
Heat/Humidity Resistance	<ol style="list-style-type: none"> No apparent damage Fulfill the electrical specification after test 	<ol style="list-style-type: none"> Temperature: $85 \pm 2^\circ\text{C}$ Humidity: 90% ~ 95% RH Duration: 1000 ± 48hrs Recovery: 1-2hrs
Thermal shock (Temperature Cycle)	<ol style="list-style-type: none"> No apparent damage Fulfill the electrical specification after test 	<ol style="list-style-type: none"> One cycle/step 1 : $125 \pm 5^\circ\text{C}$ for 30 min step 2 : $-40 \pm 5^\circ\text{C}$ for 30 min No of cycles : 100 Recovery: 1-2 hrs
Low Temperature Resistance	<ol style="list-style-type: none"> No apparent damage Fulfill the electrical specification after test 	<ol style="list-style-type: none"> Temperature: $-40 \pm 5^\circ\text{C}$ Duration: 500 ± 24hrs Recovery: 1-2hrs

Soldering Conditions

❖ Typical Soldering Profile for Lead-free Process

Reflow Soldering :

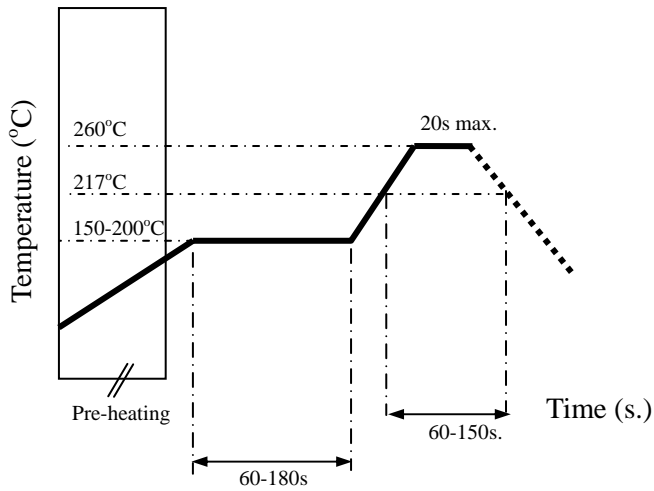

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: acx@acxc.com.tw

<http://www.acxc.com.tw>