


DP 1608 Series

Multilayer Chip Diplexers

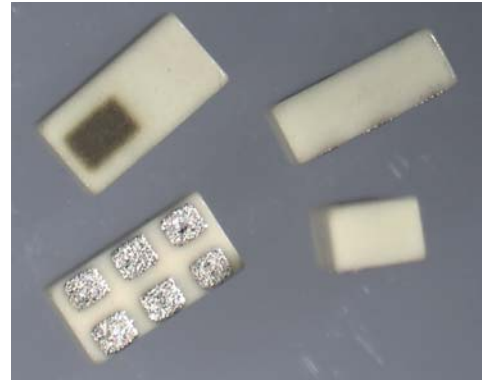

Features

- ❖ Monolithic structure including one low-pass and one band-pass filters with loss pole at adjacent passband.
- ❖ RoHS compliant.

Applications

- ❖ Dual-band / dual-mode 2.4GHz/5GHz WLAN.

Specifications

Part Number	Passband (MHz)	Insertion Loss (dB)	VSWR	Attenuation (dB)	Isolation (dB)
DP1608-R2455NNQ2	2400~2500	0.8 max. / 0.6 typ.	2.0 max.	45 min. / 50 typ. @4800~5000MHz 15 min. / 33 typ. @7200~7500MHz	40 min. / 50 typ. @2400~2500MHz
	4900~5100	1.3 max. / 1.0 typ.	2.0 max.	40 min. / 50 typ. @2400~2500MHz	40 min. / 50 typ. @4800~5000MHz
	5150~5950	1.0max. / 0.8 typ.	2.0 max.	22 min. / 25 typ. @10300~11700MHz 15 min. / 25 typ. @15300~16200MHz	40 min. / 45 typ. @5000~6000MHz


Q'ty/Reel (pcs)	: 4000
Operating Temperature Range	: -40 ~ +85 °C
Storage Temperature Range	: -40 ~ +85 °C
Storage Period	: 12 months max.
Power Capacity	: 3W max.

Part Number

DP 1608 - R 2455 NNQ2 □ /LF
 ① ② ③ ④ ⑤ ⑥ ⑦

① Type	DP : Diplexer	② Dimensions (L × W)	1.6 × 0.8 mm
③ Material Code	R	④ Frequency Range	2455=2400MHz/5500MHz
⑤ Specification Code	NNQ2	⑥ Packaging	T: Tape & Reel B: Bulk
⑦ Soldering	/LF=lead-free		


Terminal Configuration




No.	Terminal Name	No.	Terminal Name
①	GND	④	Higher Freq. Port
②	Common Port	⑤	GND
③	GND	⑥	Lower Freq. Port

Dimensions


Unit : mm




<Top View>

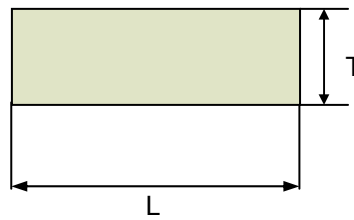

<Side View>

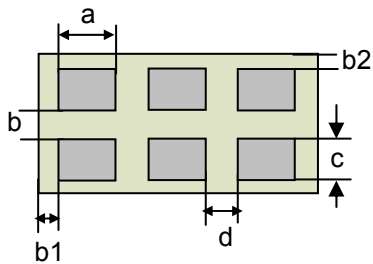


<Bottom View>




<Side View>

Mark	L	W	T	a	b	c	d	b1	b2
Dimensions	1.6±0.1	0.8±0.1	0.7 max.	0.3 ±0.1	0.2 ±0.1	0.25 ±0.1	0.2 ±0.1	0.15 ±0.05	0.05 ±0.05

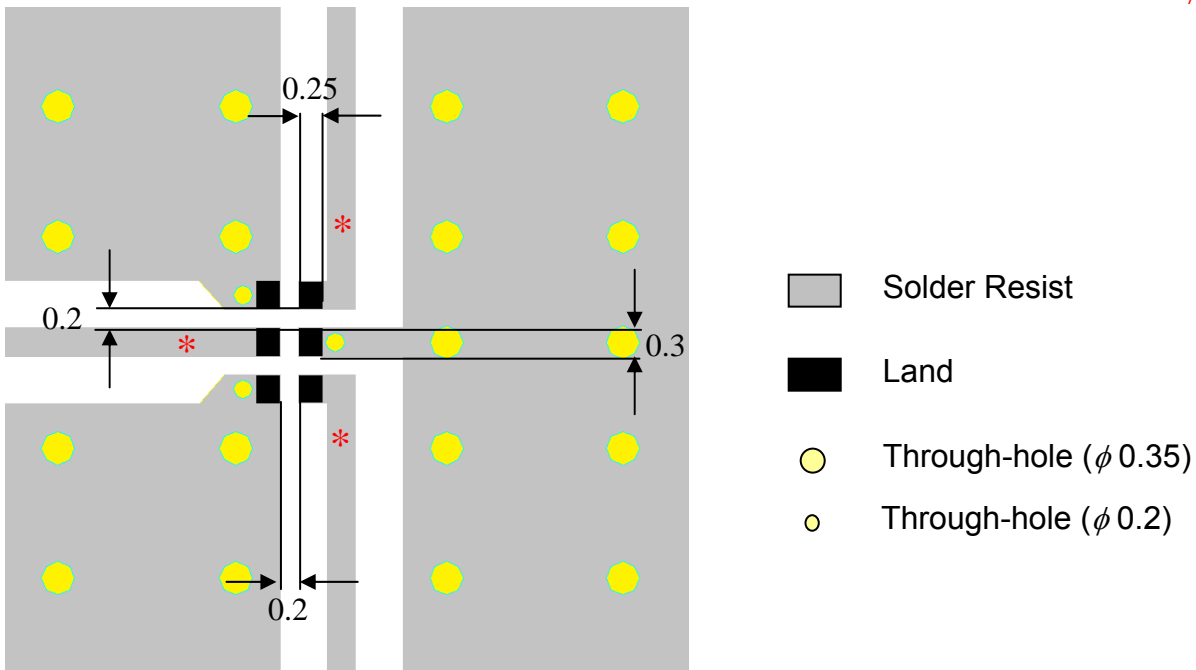


* Line width should be designed to match 50ohm characteristic impedance, depending on PCB material and thickness.

Measuring Diagram

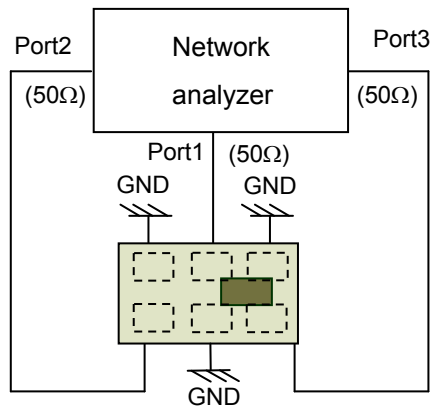


Typical Electrical Characteristics (T=25°C)


Attenuation

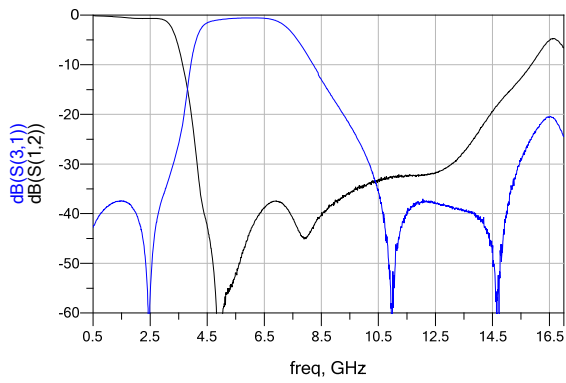

Return Loss

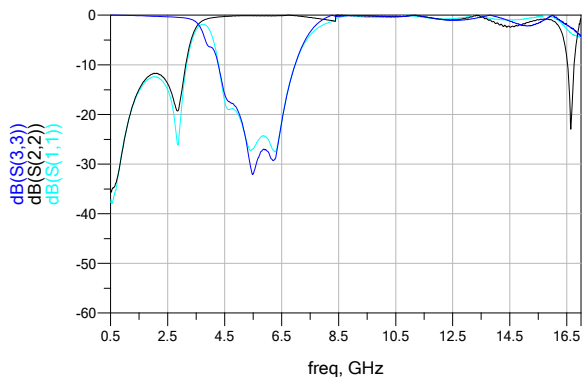

Isolation

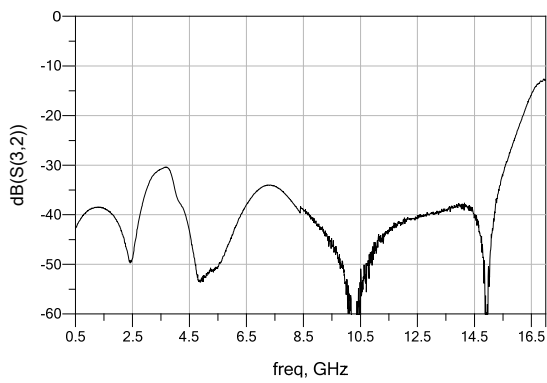


Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Taping Specifications

❖Tape Dimensions (Unit: mm) & Quantity

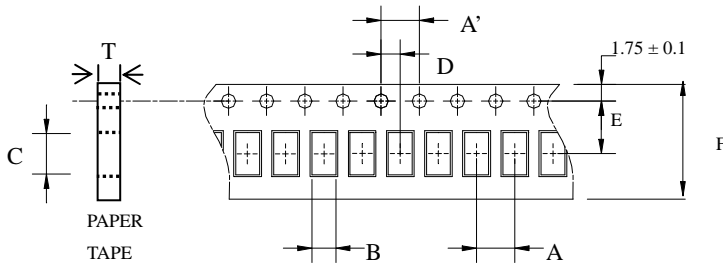

Type	A	A'	B	C	D	E	F	T	Quantity/reel	Tape material
1608	4.0±	4.0±	1.10±	1.92±	2.0±	3.5±	8.0±	0.75±	4,000pcs	Paper
	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0.05		


❖Reel Dimensions (Unit: mm)

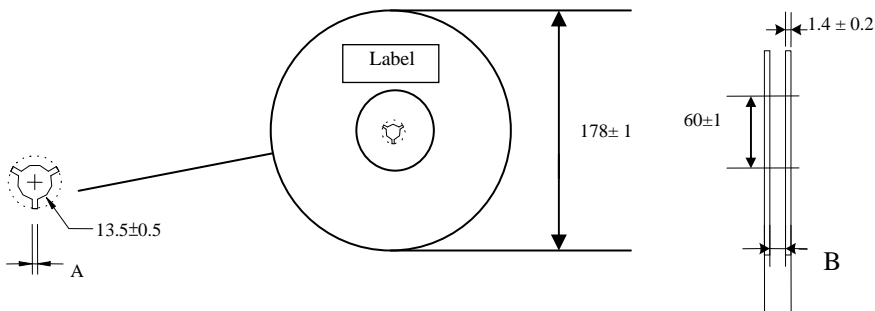


Label: Customer's Name,
ACX P/N, Q'ty, Date,
ACX Corp.

Type	A	B
1608	2.3±0.5	9.0±0.3

❖Leader and Trailer Tape

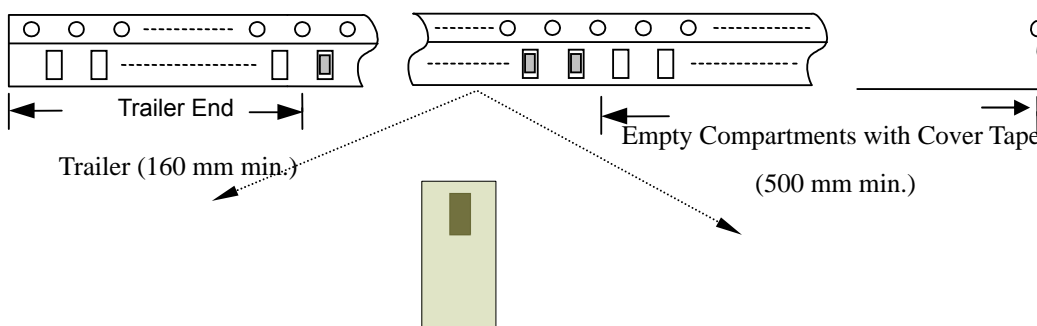

❖ **Peel-off Force**

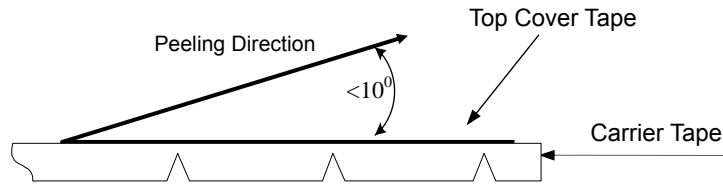

Peel-off force should be in the range of 0.1 – 0.6 N at a peel-off speed of 300 ± 10 mm/min .


❖ **Storage Conditions**

- (1) Temperature: 5 ~35°C, relative humidity (RH): 45~75%.
- (2) Non-corrosive environment.

Notes

- ❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.


Mechanical & Environmental Characteristics

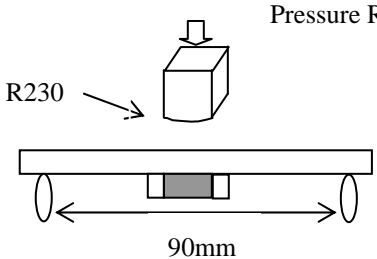Item	Requirements	Procedure
Solderability	<ol style="list-style-type: none"> No apparent damage More than 95% of the terminal electrode shall be covered with new solder 	<ol style="list-style-type: none"> Preheat: $120 \pm 5^\circ\text{C}$ Solder: $245 \pm 5^\circ\text{C}$ for 5 ± 1 sec
Soldering strength (Termination Adhesion)	<ol style="list-style-type: none"> 5N minimum 	<ol style="list-style-type: none"> Solder specimen onto test jig. Apply push force at 0.5mm/s until electrode pads are peeled off or ceramic are broken. Pushing force is applied to longitude direction
Deflection (Substrate Bending)	<ol style="list-style-type: none"> No apparent damage 	<ol style="list-style-type: none"> Solder specimen onto test jig (FR4, 1.6 mm) using the recommend soldering profile. Apply a bending force of 2mm deflection 
Heat/Humidity Resistance	<ol style="list-style-type: none"> No apparent damage Fulfill the electrical specification after test 	<ol style="list-style-type: none"> Temperature: $85 \pm 2^\circ\text{C}$ Humidity: 90% ~ 95% RH Duration: 1000 ± 48hrs Recovery: 1-2hrs
Thermal shock (Temperature Cycle)	<ol style="list-style-type: none"> No apparent damage Fulfill the electrical specification after test 	<ol style="list-style-type: none"> One cycle/step 1 : $125 \pm 5^\circ\text{C}$ for 30 min step 2 : $-40 \pm 5^\circ\text{C}$ for 30 min No of cycles : 100 Recovery: 1-2 hrs
Low Temperature Resistance	<ol style="list-style-type: none"> No apparent damage Fulfill the electrical specification after test 	<ol style="list-style-type: none"> Temperature: $-40 \pm 5^\circ\text{C}$ Duration: 500 ± 24hrs Recovery: 1-2hrs

Soldering Conditions

❖ Typical Soldering Profile for Lead-free Process

Reflow Soldering :

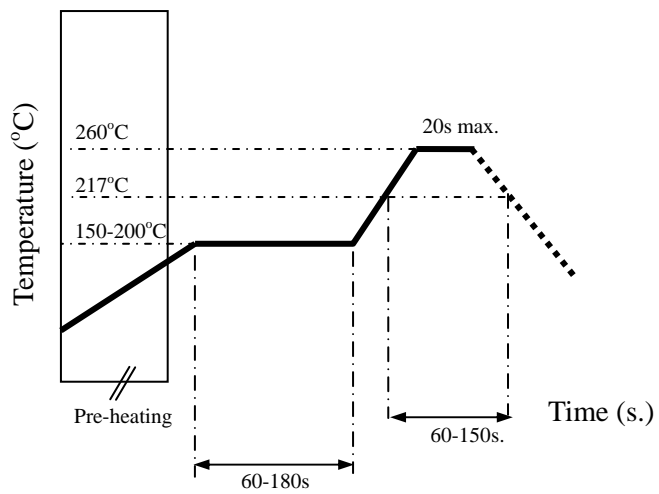

Notes

❖ The contents of this data sheet are subject to change without notice. Please confirm the specifications and delivery conditions when placing your order.

Advanced Ceramic X Corp.

16 Tzu Chiang Road, Hsinchu Industrial District Hsinchu Hsien 303, Taiwan

TEL:886-3-5987008 FAX:886-3-5987001

E-mail: acx@acxc.com.tw

<http://www.acxc.com.tw>